

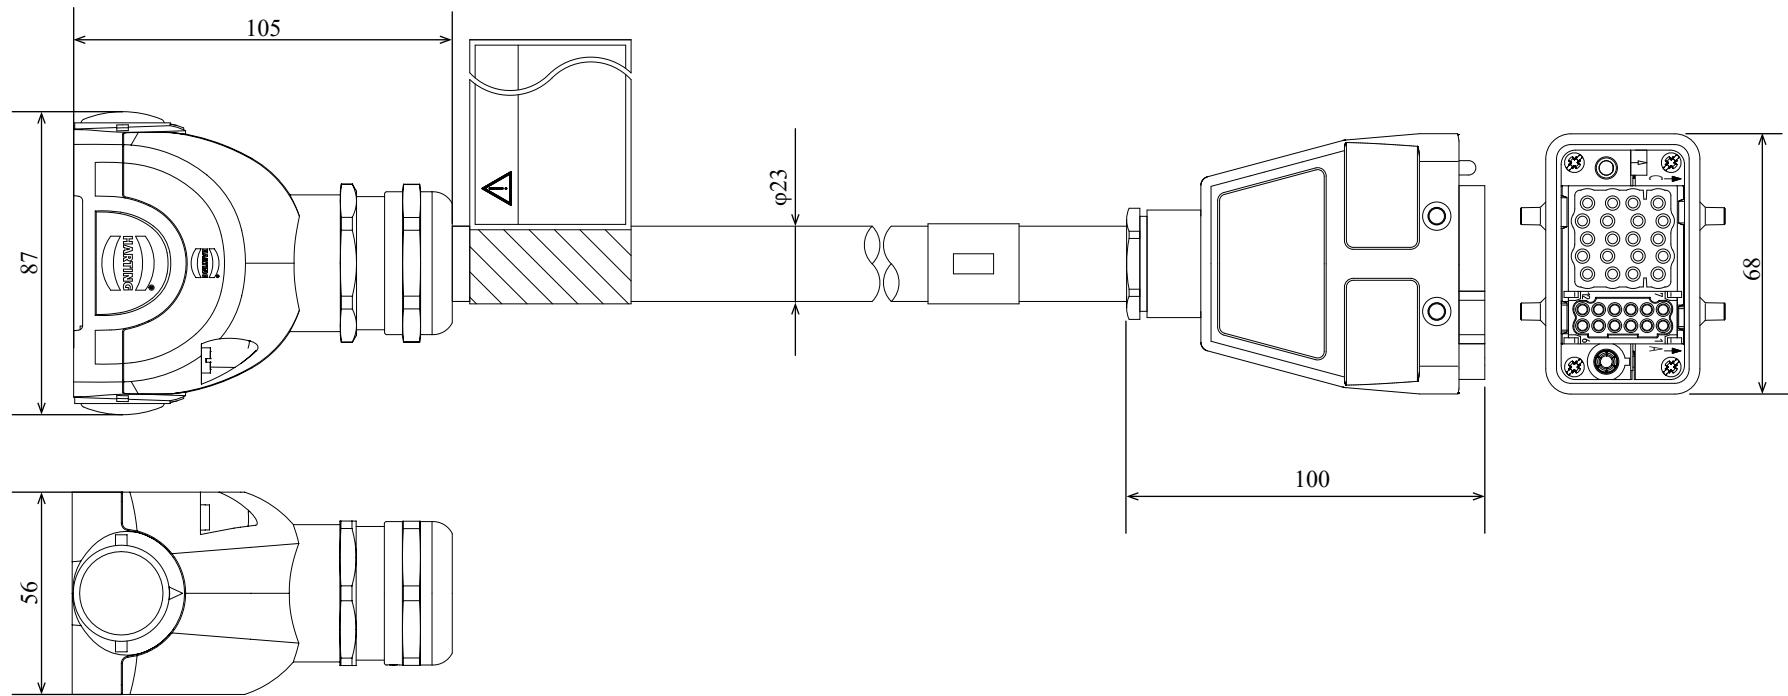


For HSR / HSA1 Straight

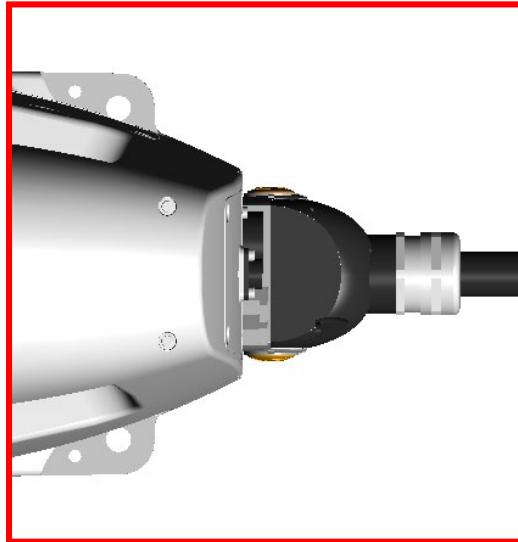



The bending radius (internal) of a motor & encoder cable should be at least 33.8 mm when the cable is stationary, and at least 225 mm when it is movable. Excessively bending will result in broken lead wires.

## HSR Straight Connector

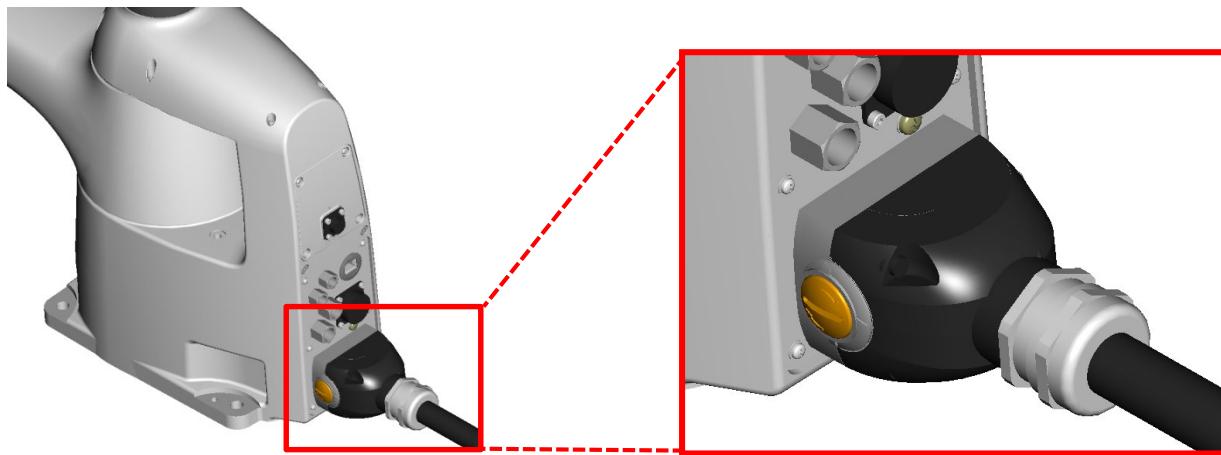

TOP VIEW

# HSA1 Straight Connector

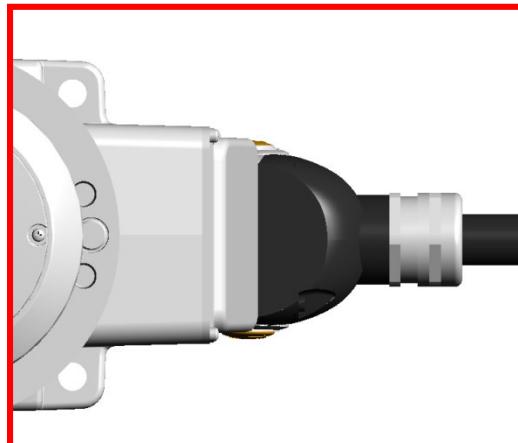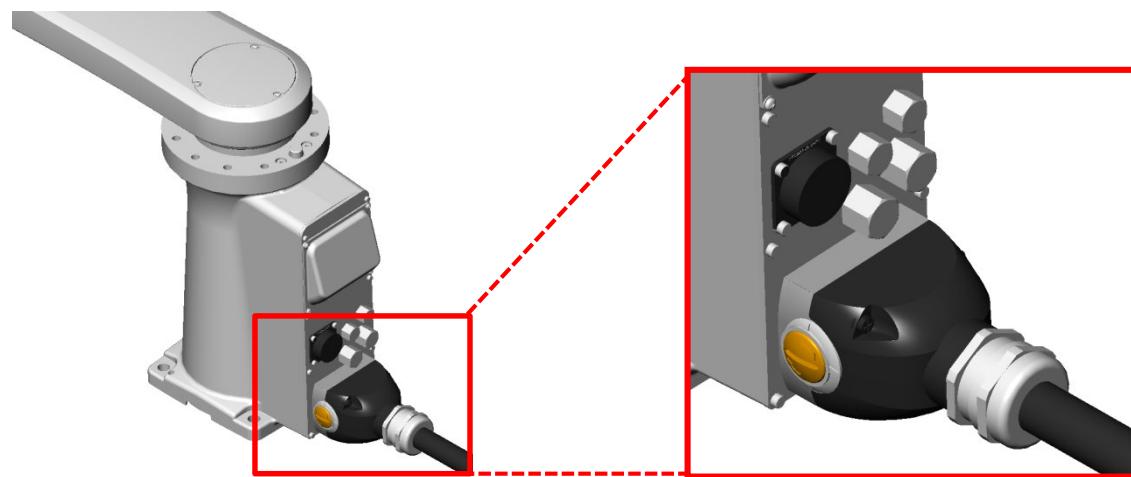

TOP VIEW