
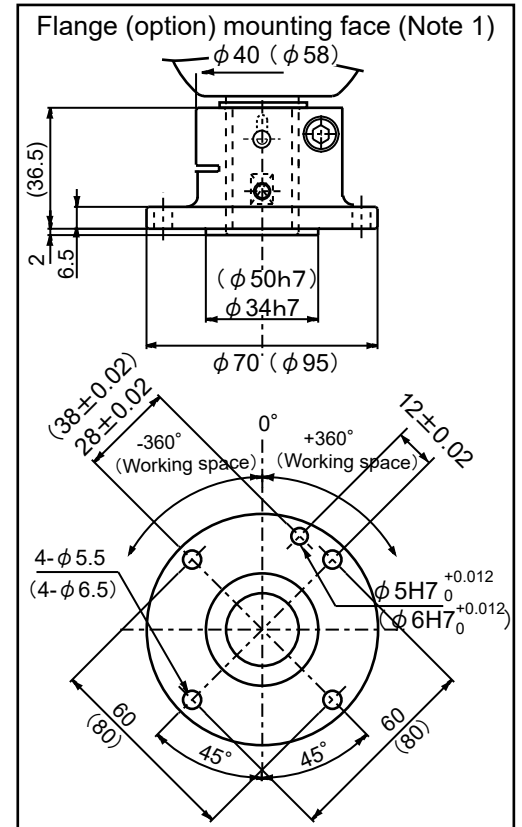
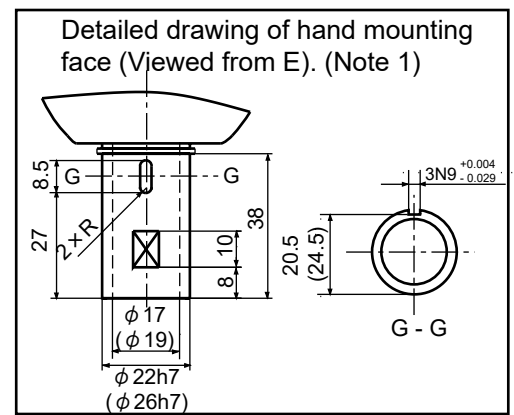


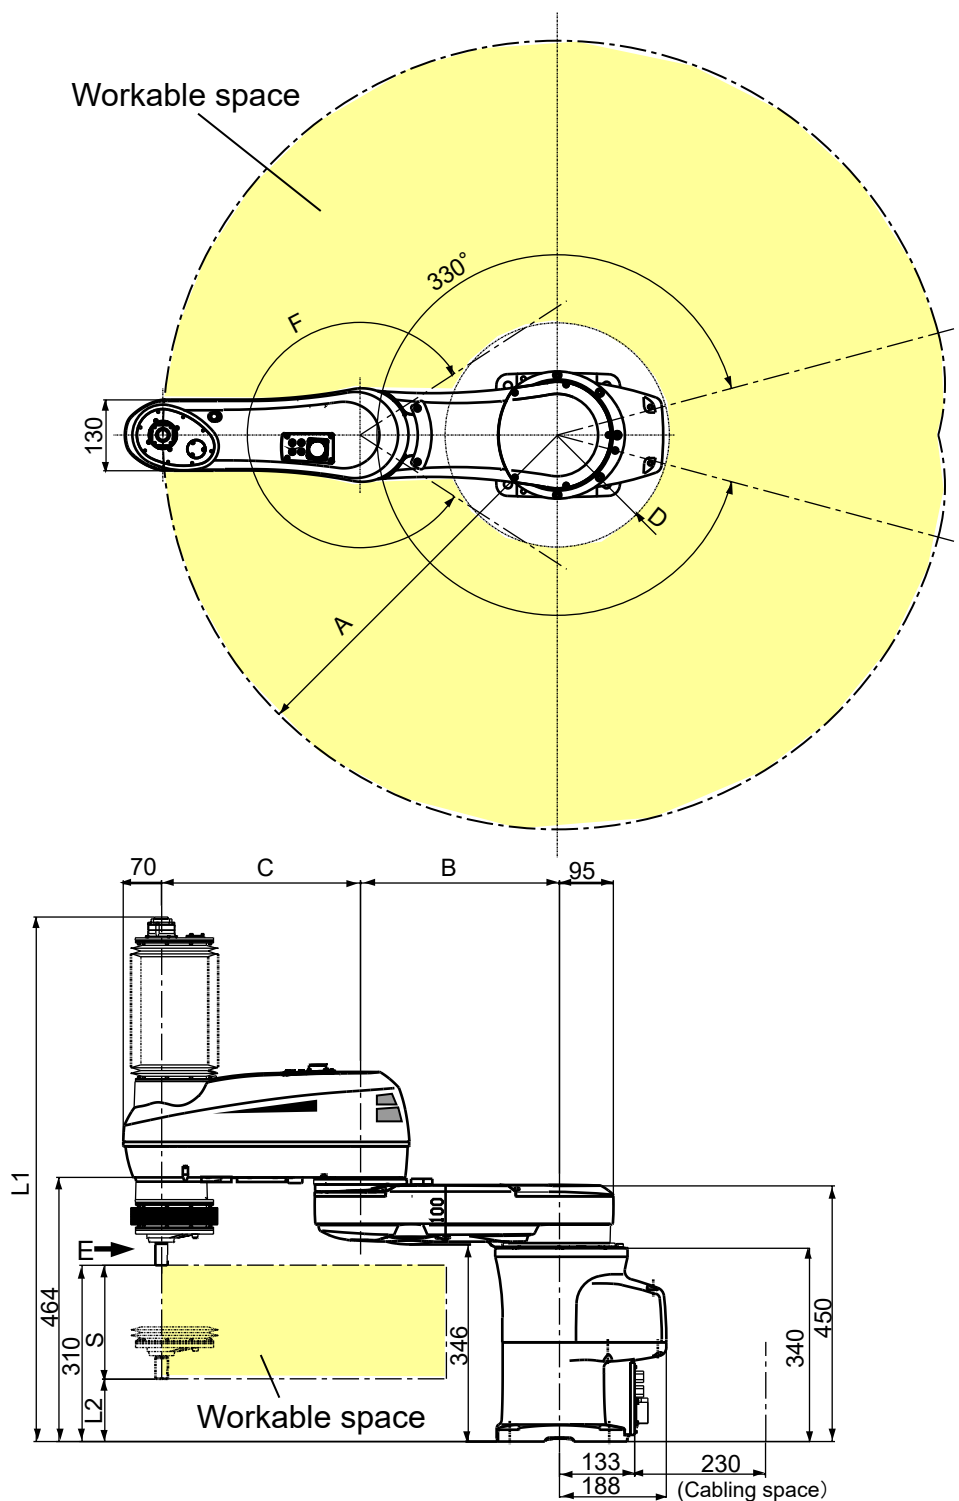

Unit: mm

Type	A	B	C	D	F
HM-4060*-W, HM-4A60*-W	600	250	350	226	280°
HM-4070*-W, HM-4A70*-W	700	350	350	205	292°
HM-4085*-W, HM-4A85*-W	850	350	500	281	294°
HM-4A852-C5, HM-4A853-C5					
HM-40A0*-W, HM-4AA0*-W	1000	500	500	284	294°
HM-4AA02-C5, HM-4AA03-C5					

S (Z axis stroke)	L1	L2
200	925	110
300	1025	10
400 (Note2)	1125	-90

Note 1: Values denote dimensions for the 10kg payload type (HM-40***-W), and values enclosed in () denote dimensions for the 20kg payload type (HM-4A***-W).

Note 2: In the case of the Z axis 400mm stroke type, the Z axis in the lowermost position may reach lower than the base mounting face.

