
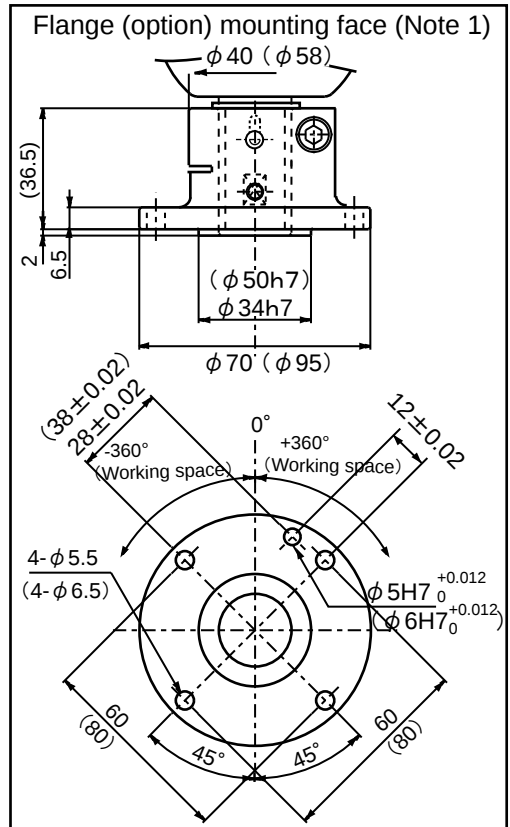
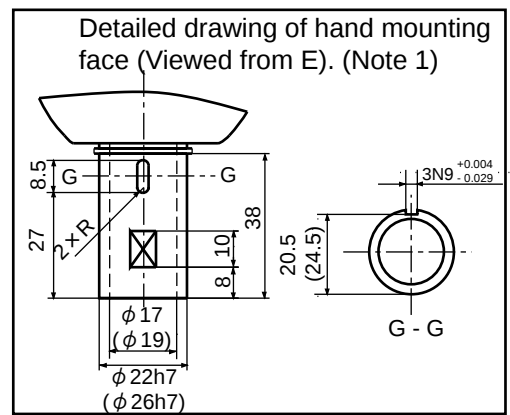


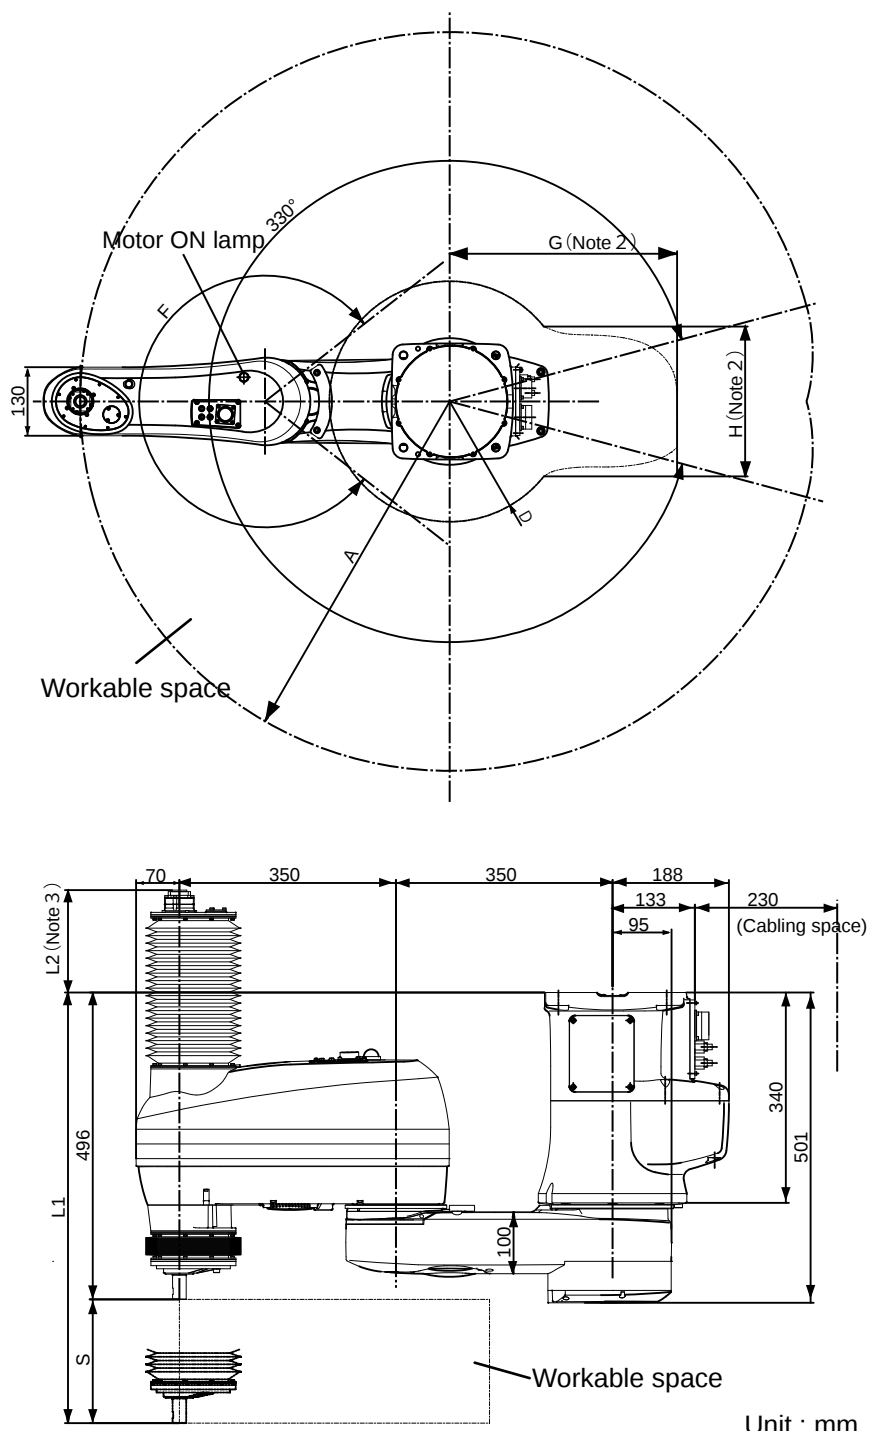

Type	A	B	C	D	F	G	H
HMS-4070*-W-UL, HMS-4A70*-W-UL	700	350	350	228	284°	431	284
HMS-4085*-W-UL, HMS-4A85*-W-UL	850	350	500	311	284°	439	237

S	L1	L2	L3
(Z axis stroke)			
200	-696	-496	166
300	-796	-496	266
400	-896	-496	366

Note 1: Values denote dimensions for the 10kg payload type (HMS-40***-W-UL), and values enclosed in () denote dimensions for the 20kg payload type (HMS-4A***-W-UL).

Note 2: The workable space is limited so that the unit does not interfere with the cables.

Note 3: In the case of the overhead-mount type, the Z axis in the uppermost position may reach higher than the base mounting face. Be careful with the interference with surrounding facilities.

