


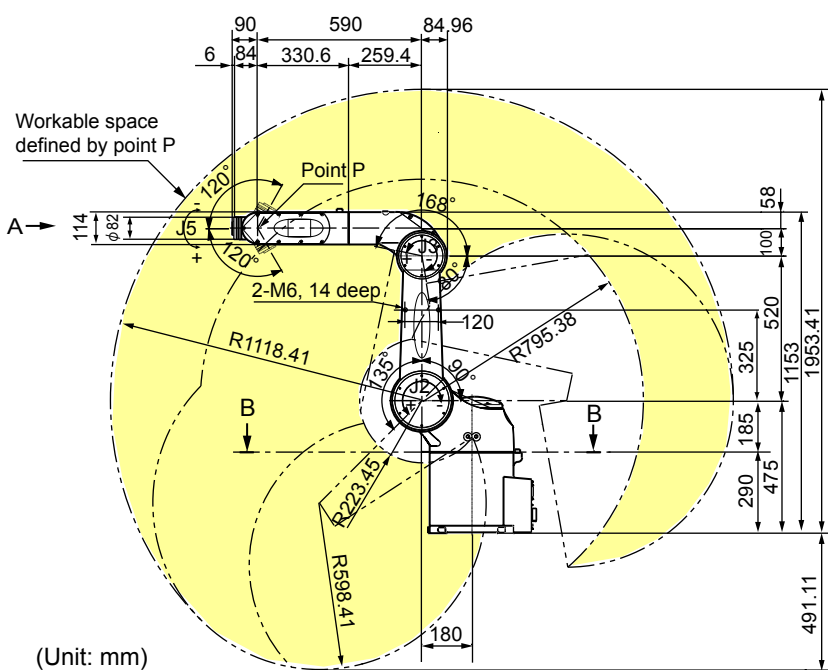

Technical drawing of a circular part with the following dimensions and tolerances:

- Outer diameter: $\phi 50h8$ with tolerance $\begin{smallmatrix} 0 \\ -0.039 \end{smallmatrix}$
- Inner diameter: $\phi 25H7$ with tolerance $\begin{smallmatrix} +0.021 \\ 0 \end{smallmatrix}$, 9.5 deep
- Inner hole diameter: $\phi 6H7$ with tolerance $\begin{smallmatrix} +0.012 \\ 0 \end{smallmatrix}$, 9 deep
- Threaded hole: 4-M6, 9 deep (P.C.D.40)

The technical drawing shows the front view of a mechanical component. It features a central circular hole with a diameter of $\phi 30$. The overall width is 250 mm, and the overall height is 250 mm. The distance from the center of rotation (J1) to the top edge is 150 mm, and to the bottom edge is 192 mm. The distance from the center of rotation to the left edge is 155 ± 0.1 mm, and to the right edge is 190 mm. There are four mounting holes, each with a diameter of $\phi 14.5$, spaced at 25 mm from the corners. A reference face is indicated on the left side.