
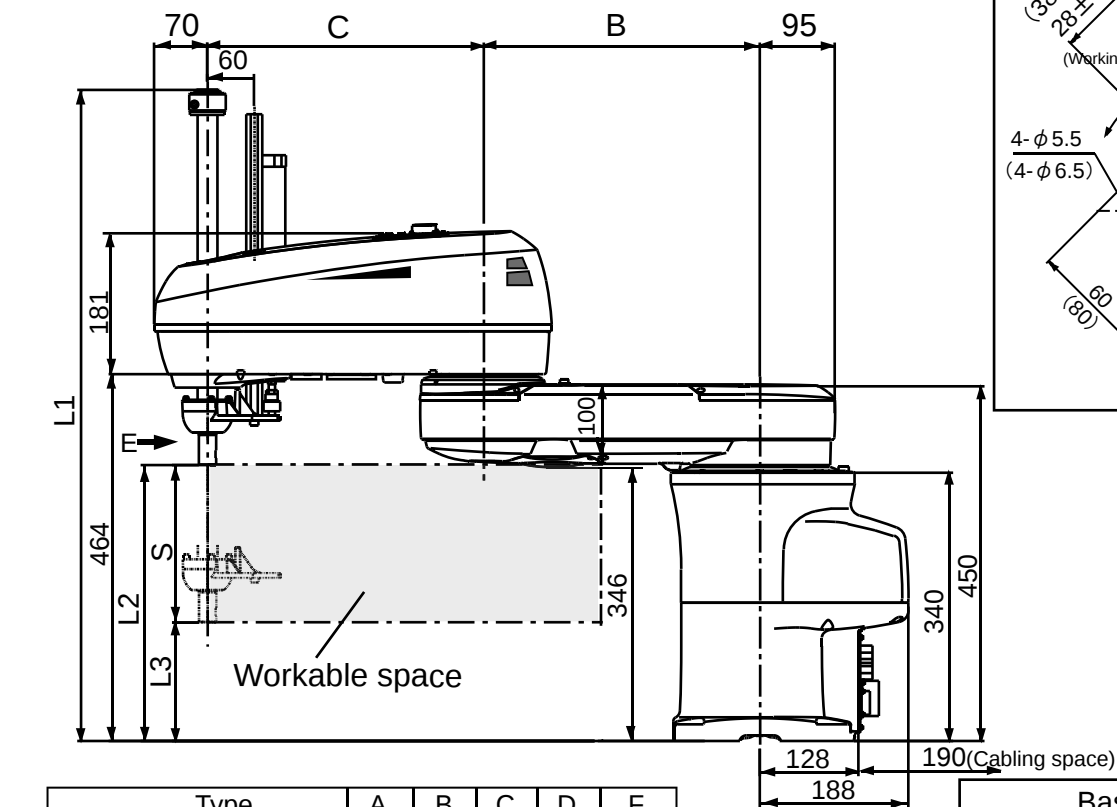


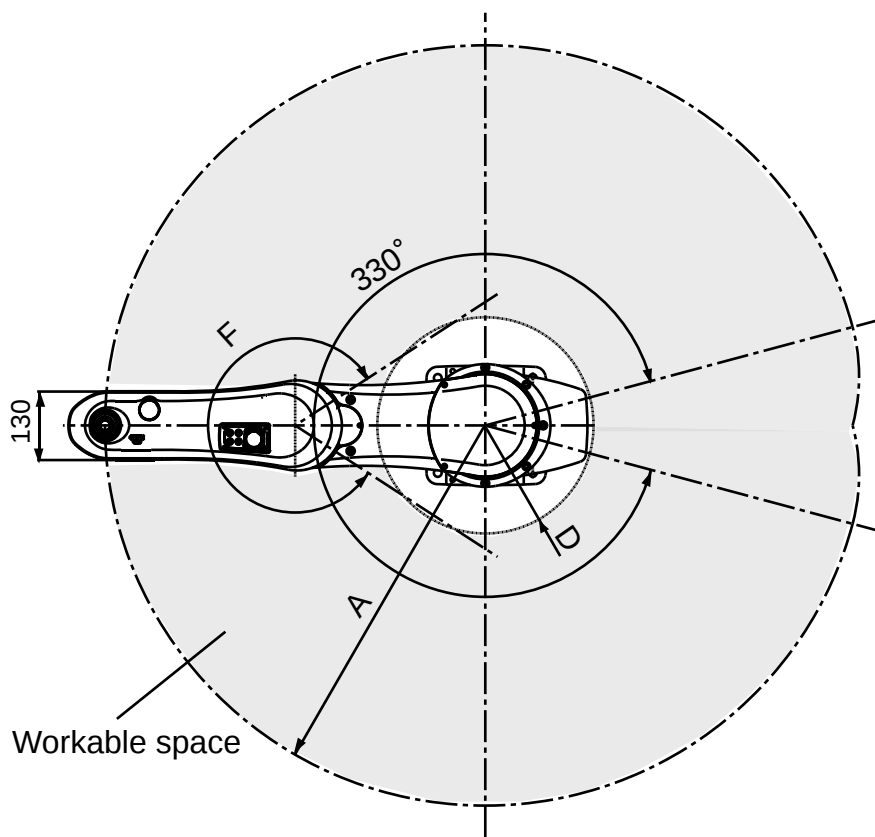

Type	A	B	C	D	F
HM-4060*, HM-4A60*	600	250	350	213	286°
HM-4070*, HM-4A70*	700	350	350	199	294°
HM-4085*, HM-4A85*	850	350	500	281	294°
HM-40A0*, HM-4AA0*	1000	500	500	284	294°

S (Z axis stroke)	L1		L2	L3
	10kg	20kg		
100	755	749	350	250
150	805	799	350	200
200	855	849	350	150
300	955	949	350	50
400(Note 2)	1055	1049	350	-50

Note 1: Values denote dimensions for the 10kg payload type(HM-40***), and values enclosed in () denote dimensions for the 20kg payload type (HM-4A***).

Note 2: In the case of the Z axis 400mm stroke type, the lowermost end of the Z axis may reach lower position than the base mounting face.

Unit : mm

