


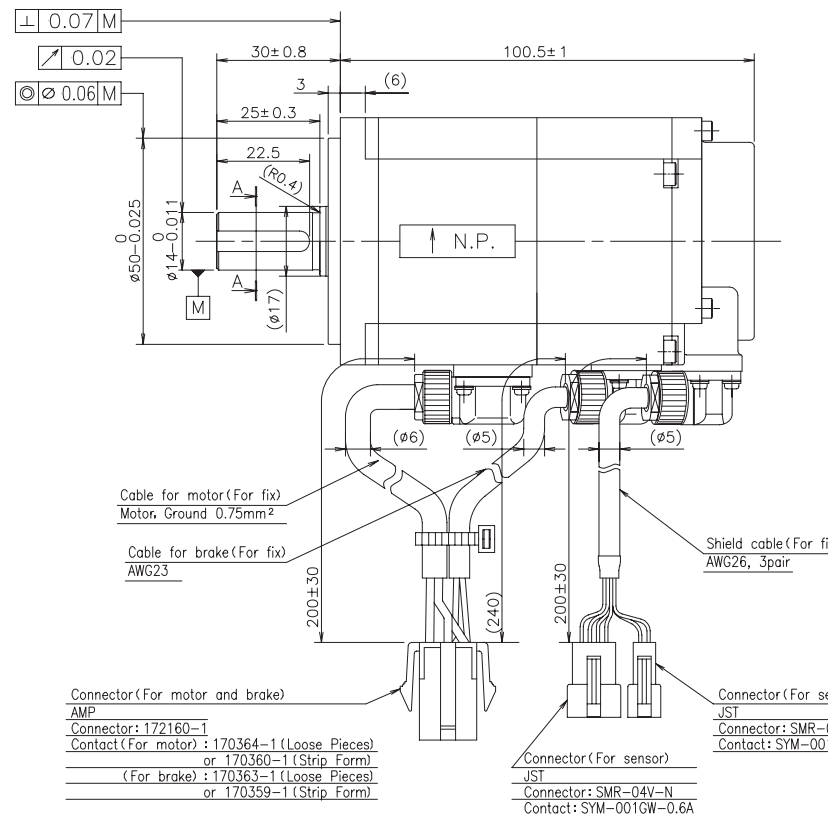

Resolution 131072P/R(17bit)
Amount of maximum multi-turn counts 65536(16bit)

- **SERVO MOTOR OUTLINE DRAWINGS** Rev. is added after model of an encoder memory.


Degrees of protection

Motor Mass

Accessory

Technical drawing of the SMR-04V-N connector. The drawing includes a cross-section view (Section AA) and a perspective view. The cross-section view shows the connector's internal structure, including a key (5x5x20L) and various dimensions: 5-0.03, 5-0.012, 5-0.042, 3+0.1, and 5-0.03. The perspective view shows the connector's external dimensions: (7.3), (18), (36.7), (19.6), (26.2), (5.7), and (19.2). The drawing also includes a label for the connector: SMR-04V-N.

Connection

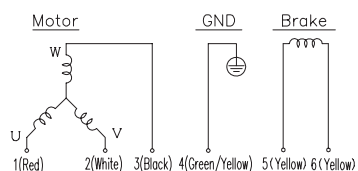

Sensor

Connector: SMR-04V-N

Pin No.	Signal	Color	Pair
1	+5V	Red	□
2	0V	Black	
3	ES+	Brown	□
4	ES-	Blue	

Connector: SMR-02V-N

Pin No.	Signal	Color	Pair
1	EBAT+	Pink	□
2	FRAT-	Purple	